


2/2-way toggle lever valve

PLUS

Art. No. 107012

Type No. 360.018-8

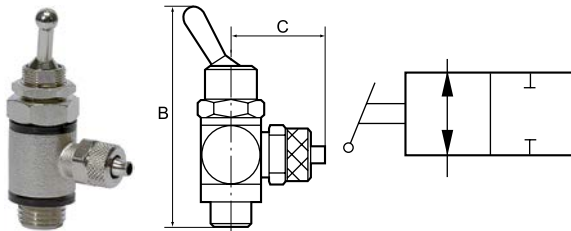

Exemplary illustration

Manually operated toggle valve, 2/2-way types. For all applications where compressed air must be switched on or off quickly and easily or a cylinder operated manually. Designed as a banjo-type valve with a hollow bolt and ring piece. Suitable for screwing directly into the equipment or for panel mounting. Compact type of construction, also ideal where space is restricted.

Technical data

Operating pressure	0 - 8 bar
Temperature range	-20 to 80 °C
Hollow bolt	Nickel-plated brass
Pivoting arm	Nickel-plated brass
Toggle	Nickel-plated brass
Internal parts	Brass with a bare metal surface
Sealant	NBR
Captive seals	Polyamide (glass fibre-reinforced)
Thread for panel mounting	M12x0.75 (max. plate thickness 4 mm)
Function	2/2-way
Type of connection	Quick lock screw fitting
Thread	G 1/8
Connection	Discharge port on both sides
For hose	8/6 mm
a/f	14 mm
B	55.0 mm
C	25.0 mm

Commercial data

Customs tariff number	74122000
Country of origin	IT
eCl@ss 5.1.4	27291701
eCl@ss 9.0	27291390
UNSPSC_Code_v190501	40141603
UNSPSC_CodeDesc_v190501	Pneumatic valves

Material informations

REACH SVHC1 substance name	Blei
CAS no. SVHC 1	7439-92-1
RoHS materials notice	RoHS konform
REACH Info	enthält SVHC Stoff

Accessories

	Art. No.	Type No.
Hexagon lock nut / M12x0.75 / nickel-plated brass	107037	252 M/S