

**»multifix« series**

Seat valves operated by secondary pressure for controlled pressurisation of pneumatic systems.  
 The full cross-section of the regulator is opened at 50% of the input pressure.  
 The filling time can be altered by turning the adjusting screw.

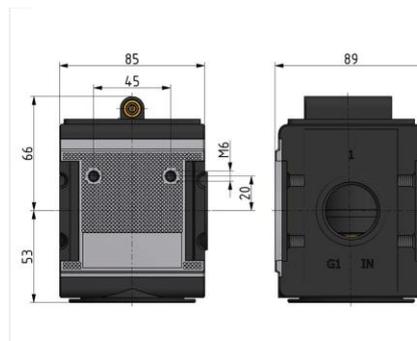



Inlet pressure: 2 - 16 bar  
 Medium temperature: -10 to 60 °C  
 Ambient temperature: -10 to 60 °C  
 Sealant: NBR  
 Flow rate measurement: At  $P_1 = 6$  bar and pressure drop  $\Delta p = 1$  bar

**Start-up valve**

Art. No.	Type No.	Thread	Housing	Flow rate l/min	Size
133143	A 44 F	G 3/4	Die-cast aluminium	10000	4

**Accessories**

Art. No.	Type No.	Description
135857	KP 45	Coupler pack for modular assembly of several devices


**filling characteristic**

**flow characteristic**

**operating conditions**

**symbol**
