




Material	Nickel-plated brass
Max. operating pressure	18 bar
Max. operating temperature	200 °C
Suitable hose materials	PA, PE, PU

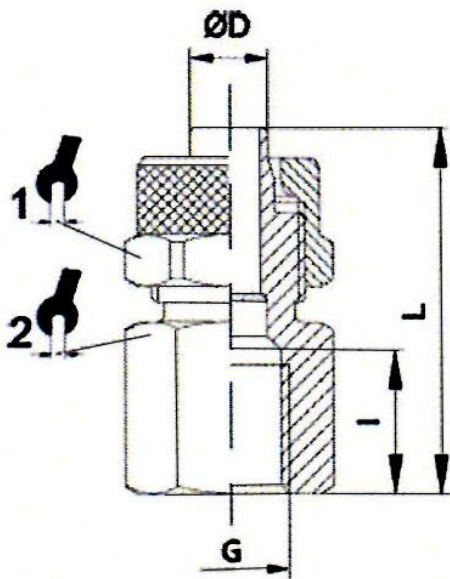

11.514-8-E

Female connector, female thread

Art. No.	Type No.	ØD	G	I	L			O-ring
114766	11.518-6-E	6/4	G 1/8	8.0	25.0	12	14	without
114767	11.518-8-E	8/6	G 1/8	8.0	25.0	14	14	without
114764	11.514-6-E	6/4	G 1/4	11.0	29.0	12	17	without
114765	11.514-8-E	8/6	G 1/4	11.0	29.0	14	17	without
114763	11.514-10-E	10/8	G 1/4	11.0	30.5	16	17	without
114769	11.538-6-E	6/4	G 3/8	11.5	29.5	12	20	without
114770	11.538-8-E	8/6	G 3/8	11.5	29.5	14	20	without
114768	11.538-10-E	10/8	G 3/8	11.5	31.0	16	20	without
114762	11.512-8-E	8/6	G 1/2	14.0	33.0	14	24	without
114761	11.512-10-E	10/8	G 1/2	14.0	34.5	16	24	without