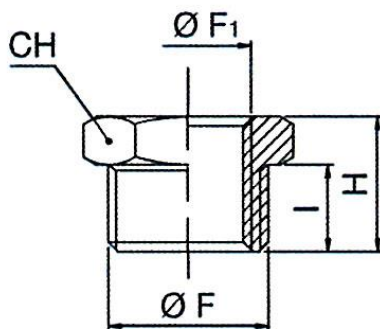


**Standard screw fittings**

Nickel-plated brass, »value line«

 Max. operating pressure            60 bar  
 Max. operating temperature       150 °C


251.02/N-E

**Reducing nipple**

Art. No.	Type No.	F	F1	I	H	CH
115654	251.00/N-E	G 1/8	M5	6.0	10.5	14
115655	251.01/N-E	G 1/4	G 1/8	8.0	13.0	17
115658	251.06/N-E	G 3/8	G 1/8	9.0	14.0	19
115656	251.02/N-E	G 3/8	G 1/4	9.0	14.0	19
115660	251.08/N-E	G 1/2	G 1/8	10.0	15.5	24
115659	251.07/N-E	G 1/2	G 1/4	10.0	15.5	24
115657	251.03/N-E	G 1/2	G 3/8	10.0	15.5	24