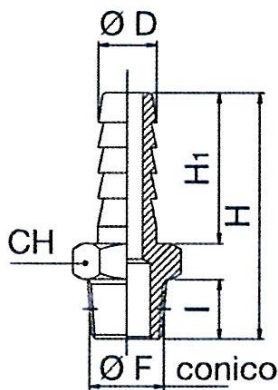


Male hose fittings

Nickel-plated brass, »value line« Series

 Max. operating pressure 60,0 bar
 Max. operating temperature 150 °C


239.107-E

Male hose fitting, conical male thread

Art. No.	Type No.	D	F	I	H	H1	CH
115587	239.101-E	6.0	R 1/8	8.0	31.5	19.0	12
115588	239.102-E	8.0	R 1/8	8.0	31.5	19.0	12
115589	239.103-E	9.0	R 1/8	8.0	31.5	19.0	12
115590	239.104-E	10.0	R 1/8	8.0	32.5	20.0	12
115591	239.105-E	6.0	R 1/4	11.0	35.0	19.0	14
115592	239.106-E	8.0	R 1/4	11.0	35.0	19.0	14
115593	239.107-E	9.0	R 1/4	11.0	35.0	19.0	14
115594	239.108-E	10.0	R 1/4	11.0	36.0	20.0	14
115595	239.109-E	12.0	R 1/4	11.0	36.0	20.0	14
115596	239.110-E	9.0	R 3/8	11.5	35.5	19.0	17
115597	239.111-E	10.0	R 3/8	11.5	36.5	20.0	17
115598	239.112-E	12.0	R 3/8	11.5	36.5	20.0	17
115599	239.113-E	9.0	R 1/2	14.0	38.5	19.0	22
115600	239.114-E	10.0	R 1/2	14.0	39.5	20.0	22
115601	239.115-E	12.0	R 1/2	14.0	39.5	20.0	22