


For compressed air, anti-spark.

For simple mounting on the wall or ceiling. Shock resistant, solid and closed housing made of POM, disposal/outflow R 3/8 ET and with light, heavy duty, oil resistant and spark erosion protected polyurethane hose. The hose is resistant to flying sparks and scorching, which can occur in the welding environment or with the use of cutting tools. Incl. 1.5 m supply hose.

Hose material	braided, spark erosion protected polyurethane
Max. operating pressure	12 bar
Operating temperature	-20 °C to 60 °C
Swivel angle	180 °

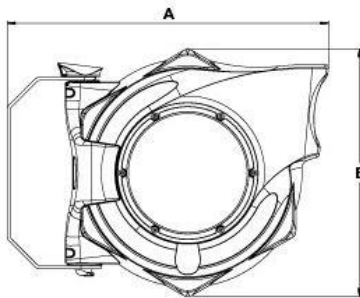

259/5130-1

Hose reel for compressed air, anti-spark

Art. No.	Type No.	Hose size mm	Hose length m	A mm	B mm
159988	259/5130-1	9.5x13.5	14	490.0	409.0